



Features:

- Crosshead handles for ease of
- Metal back nuts for added durability
- Supplied with metal handles
- Chrome plated to BS EN 248

Product Certifications:

For more products, visit our website: http://www.bristan.com

의영민	Flow Rates (I/min)						
	System Pressure (bar)	0.2	0.5	1	2	3	5
	K 3/4 G (Cold)	22.5	35.8	50.6	71.6	87.8	113.2
	K 3/4 G (Hot)	22.5	35.8	50.6	71.6	87.8	113.2
TECHNICAL DATA	0° 0U4(1) 0° 5 0° 100 VEARS 0° 0U4(1) 100 VEARS 0°		B	RIS	37/	AN	




Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Crosshead Handles				
Connection Inlet:	3/4" BSP				
Connection Outlet:	Open				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/2" Compression Valves				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Isolation Included:	No				

Dimensions (measurements in mm)

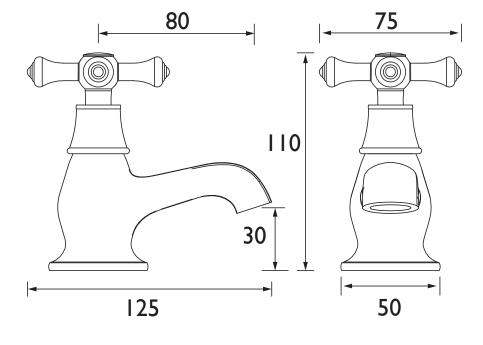

D8