COB BSM C

COBALT Tap Range Cobalt Bath Shower Mixer Chrome



_							s:
_	$^{\circ}$	\mathbf{a}	т	11	\boldsymbol{r}	\frown	С.
	ᆫ	a	u	u		C	Э.

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.5m hose, rub-clean anti-limescale handset and wall bracket
- Minimum working pressure of 0.3 bar

Product Certifications:



WRAS Certificate No: 2107078 WRAS Expiry Date: 31/07/2026




16.7 l/min

For more products, visit our website: http://www.bristan.com



Specification **Product Type:** Bathroom Tap Main Construction Material: Brass Deck Mounted Mount Type: Handle Type: Lever Handles 3/4"BSP **Connection Inlet: Connection Outlet:** Anti-Splash **Number of Tap Holes:** 1/4 Turn 3/4" Ceramic Disc Valve Valve/Cartridge Type: **Plumbing System Requirements:** Suitable for all plumbing systems Minimum Dynamic Pressure (bar): 0.3 bar 5.0 bar Maximum Dynamic Pressure (bar): 65°C Maximum Hot Water Temperature °C: Maximum Static Pressure (bar): 10 bar Flow Type: Single Flow **Isolation Included:** No

Dimensions (measurements in mm)

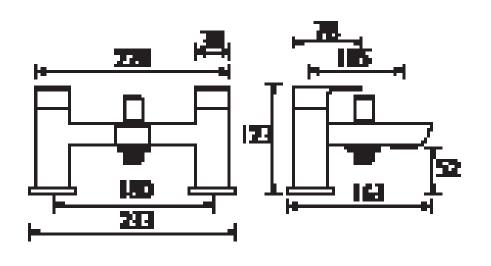

Flow Rates (I/min)										
System Pressure (bar)	0.3	0.5	1	2	3	5				
Through Bath Filler (mixed)	25.8	40.8	57.7	81.6	99.9	129				
Through Handset (mixed)	4.3	6.8	9.6	13.6	16.7	21.6				

TECHNICAL DATA SHEET



