EC SNK EF C

ECHO Tap Range Echo Easyfit Mono Sink Mixer Chrome



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal fixing nut for added durability
- Easyfit base included
- Flexible tails included

Product Certifications:



WRAS Cert. Number: 2012918 WRAS Expiry Date: 31/12/2025




For more products, visit our website: http://www.bristan.com



SpecificationProduct Type:Kitchen TapsMain Construction Material:BrassMount Type:DeckHandle Type:LeverConnection Inlet:1/2" BSP Female Flexible TailsConnection Outlet:Screw-in Aerator	
Main Construction Material: Brass Mount Type: Deck Handle Type: Lever Connection Inlet: 1/2" BSP Female Flexible Tails	
Mount Type: Deck Handle Type: Lever Connection Inlet: 1/2" BSP Female Flexible Tails	
Handle Type: Lever Connection Inlet: 1/2" BSP Female Flexible Tails	
Connection Inlet: 1/2" BSP Female Flexible Tails	
Connection Outlet: Screw-in Aerator	
Serew in Actual	
Number of Tap Holes: 1	
Valve/Cartridge Type: 1/2" Ceramic Disc Valve	
Plumbing System Requirements: Suitable for all plumbing systems	
Minimum Dynamic Pressure (bar): 0.4 bar	
Maximum Dynamic Pressure (bar): 5.0 bar	
Maximum Hot Water Temperature °C: 65°C	
Maximum Static Pressure (bar): 10 bar	
Flow Type: Single Flow	
Isolation Included: Yes	

Dimensions (measurements in mm)

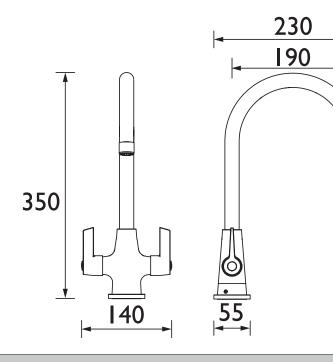

220

	Flow Rates (I/min)						
	System Pressure (bar)	0.4	0.5	1	2	3	5
	EC SNK EF C (mixed)	10.4	11.8	17.2	24.8	30.6	39.7
TECHNICAL DATA SHEET	S QUALIA S QUALIA S QUALIA S QUALIA 10 10 10 10 10 10 10 10 10 10		B	RIS	ST/	AN	D10

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.