GLIDE Tap Range Glide Bath Filler Chrome

D1






Features:


• Metal Backnuts

http://www.bristan.com

Ceramic Disc

Specification	
Style:	Contemporary
Product Type:	Bathroom Taps
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Lever
Connection Inlet:	3/4" BSP Male Connector
Connection Outlet:	Open
Number of Tap Holes:	2
Valve/Cartridge Type:	3/4" CD Valves 1/4 Turn
Plumbing System Requirements:	All Plumbing Systems
Working Pressure Range:	0.2-5.0
Maximum Hot Water Temperature: °C	65
Maximum Dynamic Pressure: (bar)	5
Maximum Static Pressure: (bar)	10
Flow Type:	Single
Flow Rate: (I/min @ 3 bar)	99
Isolation Included:	No



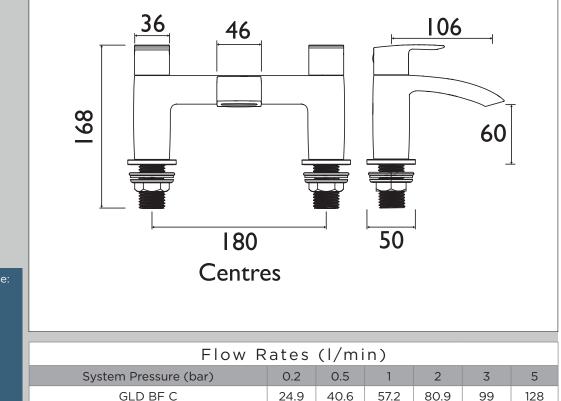

Flow Rates (I/min)

System Pressure (bar)
0.2
0.5
1
2
3

GLD BF C
24.9
40.6
57.2
80.9
99

TECHNICAL
Image: Sheet
<td

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.