
## NAPOLI Tap Range Napoli Bath Shower Mixer

## NAP BSM C



## Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10 year parts and 1 year labour guarantee for peace of mind.

## Product Certifications:




WRAS Certificate No: 2312352 WRAS Expiry Date: 31/12/2028



KIWA Certificate No. 2311735 KIWA Expiry Date: <u>09/11/2028</u>

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M24 Recessed Aerator			
Number of Tap Holes:	2			
Hose Length (mm):	1500			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

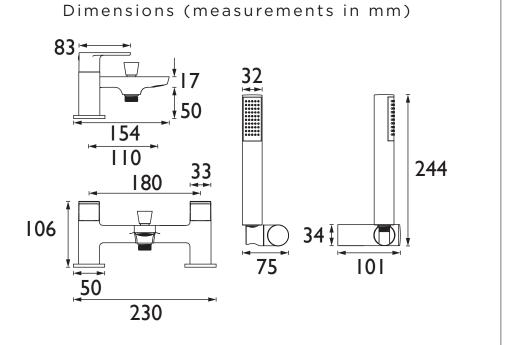

KUKreg4	Flow Rates (I/min)						
	System Pressure (bar)	0.2	0.5	1	2	3	5
Water Label	Through Bath Filler (mixed)	12.6	20.4	29.6	41.8	51.2	66
	Through Handset (mixed)	4	6.7	9.6	14.1	18.4	23.8
TECHNICAL DATA SHEET	PLARS POLATINA PLARS POLATINA PLARS POLATINA *		B	RIS	377	AN	D6

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.