

PM2 SQSHXDIV C

PRISM Shower Range Prism Exposed Sequential Shower Valve with Diverter and Rigid Riser Kit



Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Includes diverter, shower rose, rigid riser, rub-clean anti-limescale handset and hose


Product Certifications:



WRAS Cert. Number: 2207908
WRAS Expiry Date: 31/07/2027




For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--|--|
| Style: | Contemporary |
| Finish/Colour: | Chrome |
| Main Construction Material: | Brass |
| No of Controls: | 2 |
| Shower Type: | Exposed Sequential Shower Valve |
| Shower Head Type: | Fixed Head and Handset |
| Valve/Cartridge Type: | Thermostatic Sequential Cartridge |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | Suitable for high pressure plumbing systems only |
| Working Pressure Range: | Min: 1 bar, Max: 5 bar |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | G 1/2" |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Dimensions (measurements in mm)

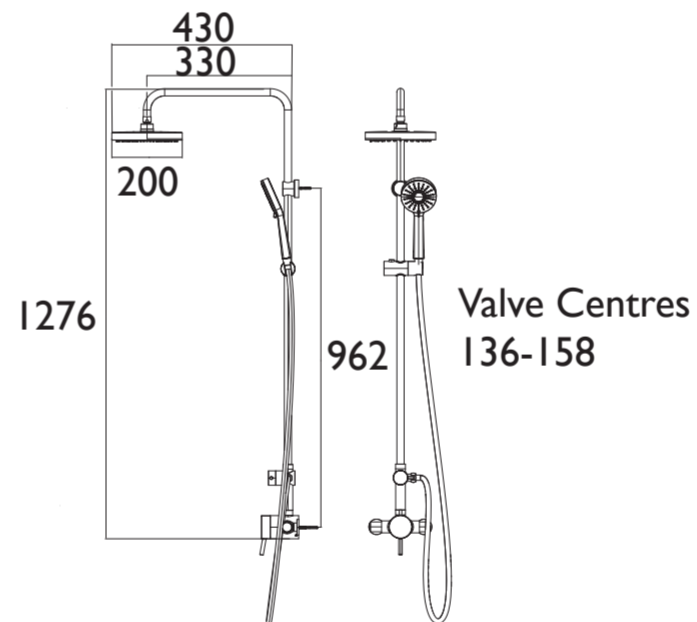

Flow Rates (l/min)

| System Pressure (bar) | 1 | 2 | 3 | 4 | 5 |
|---|-----|-----|------|------|------|
| Through Fixed Head with Flow Regulators | 6.4 | 9.4 | 11.6 | 13.4 | 14.5 |
| Through Fixed Head w/o Flow Regulators | 6.6 | 9.5 | 11.9 | 13.7 | 15.5 |
| Through Handset with Flow Regulators | 5.2 | 7.7 | 9.6 | 11.1 | 12.6 |
| Through Handset w/o Flow Regulators | 5.3 | 7.8 | 9.8 | 11.3 | 13.1 |

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D6

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com
* - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.