PM BSM E6 C

PRISM Tap Range Prism Pillar Bath Shower Mixer Eco6 Chrome



Specification				
Product Type:	Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Features:

- Chrome plated to BS EN 248
- Includes single function rub clean handset, 1.75m hose & wall bracket
- Product supplied with either a 6 or 8 litre per minute flow regulator which can be fitted to the shower hose outlet to reduce water consumption and increase water efficiency

Product Certifications:






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

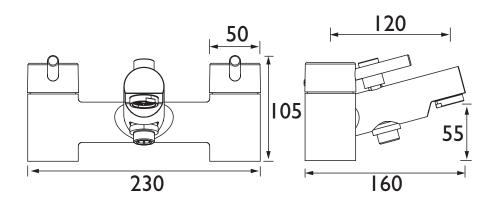

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Bath Filler (mixed)	10.3	16.2	22.9	32.4	39.7	51.3		
Through Handset (mixed)	6	6	6	6	6	6		

TECHNICAL DATA SHEET



