MI BF C

MILA Tap Range Mila Bath Filler Tap Chrome



_			
ь.	\sim	ti i	res:
	Ca	uu	II CO.

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Also available in other finishes.

Product Certifications:




WRAS Certificate No: 2204909 WRAS Expiry Date: 30/04/2027

For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Bathromm Taps					
Main Construction Material:	Brass					
Mount Type:	Deck Mounted					
Handle Type:	Round					
Connection Inlet:	3/4" BSP					
Connection Outlet:	Flow Straightener					
Number of Tap Holes:	2					
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.2 bar					
Maximum Dynamic Pressure (bar):	5 bar					
Maximum Hot Water Temperature °C:	60°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single					
Isolation Included:	No					

Dimensions (measurements in mm)

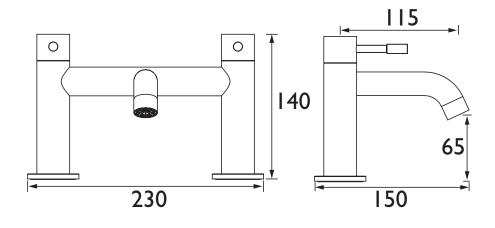

Flow Rates (I/min)									
System Pressure (bar)	0.2	0.5	1	2	3	5			
MI BF C (mixed)	19.9	32.8	46.9	66.8	80.3	103.7			

TECHNICAL DATA SHEET



